

align mark lines on the camshaft sprocket in parallel with the cylinder head machining surface and the trough of camshaft neck upwards.




Insert ruler between rocker arm and valve, and inspect valve clearance.

Valve clearance (when engine is in cold condition)

IN: 0.05mm

EX: 0.15-0.20mm

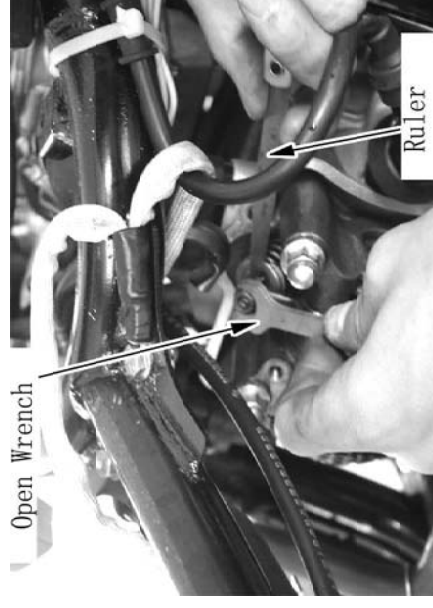

Adjustment

Loosen locknut with open wrench, and loosen valve